



The full range of reducers, couplings and bends can be equipped with the self sealed system

SPIRO[®] SHAPER


The Spiro[®] Shaper stands out with the efficiency to mount gaskets in a fast and accurate fashion on fittings. The focus on smaller diameter range (100 – 500 mm) results in a high output volume combined with consistency due to the precise machine set-up.

Moreover, the Spiro[®] Shaper can produce a rolled edge on non-gasket products. In addition, the machine handles any type of fittings (e.g. saddle, bends, T-pieces). Also, to optimize the leakage tightness, Spiro[®] implemented 5 different widths of rubber gaskets, covering the entire dimension range.




Technical Data

Diameter Range	100 – 500 mm (4" - 20")
Material Thickness	0.5 - 0.9 mm (0.020" - 0.035") galvanized steel 0.5 - 0.8 mm (0.020" - 0.031") stainless steel
Power Supply	400V / 50Hz / 3 Phases (other voltage on request)
Pneumatic Connection	7 bar, 200 l/min. (as required minimum)
Maximum Output	4-6 pcs/min. of 2-gasket fittings (Ø160 mm)

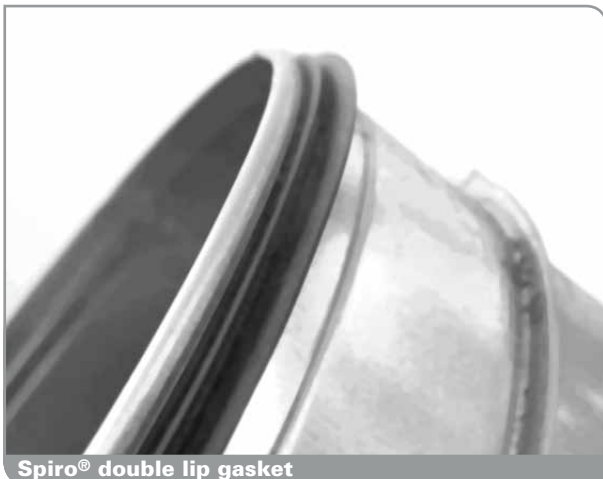

Spiro[®] double lip gasket

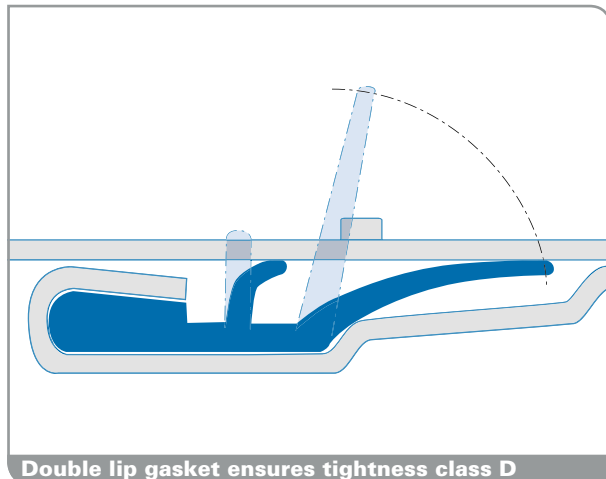

Double lip gasket ensures tightness class D